

GRABO

# Acoustic Pro

HIGH PERFORMANCE ACOUSTICAL FLOOR COVERING

## PERFORMANCE, FEATURES & BENEFITS

Easy to clean surface | Excellent foot comfort | Dimensionally stable  
Antistatic | Anti-bacterial | 7 year warranty

## SPECIFICATIONS

### DESCRIPTION


Construction	heterogeneous	
Total thickness	EN ISO 24346	3,2 mm
Wear layer thickness	EN ISO 24340	0,55 mm
Width of roll	EN ISO 24341	2   4 m
Length of roll	EN ISO 24341	25 lm
Total weight	EN ISO 23997	2,7 kg/m <sup>2</sup>

### CLASSIFICATION

European classification	EN 685	class: 33/42
-------------------------	--------	--------------

### PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0,2 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	class: Bfl-s1
	BS 476	class: Class1
	Gost 30402-94	class: G1
Impact sound reduction	EN ISO 717-2	$\Delta L_w=19$ dB
Slip resistance	DIN 51130	R9
Electrical resistance	EN 1815	< 2 kV
	EN 1081	$\leq 10^9 \Omega$
Chemical resistance	EN ISO 26987	✓
Bacterial resistance	EN ISO846:1999	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment		PUR Surface
Anti bacterial and fungicid treatment		graboSAN
Seaming method		hot or cold welding
Warranty		7 year

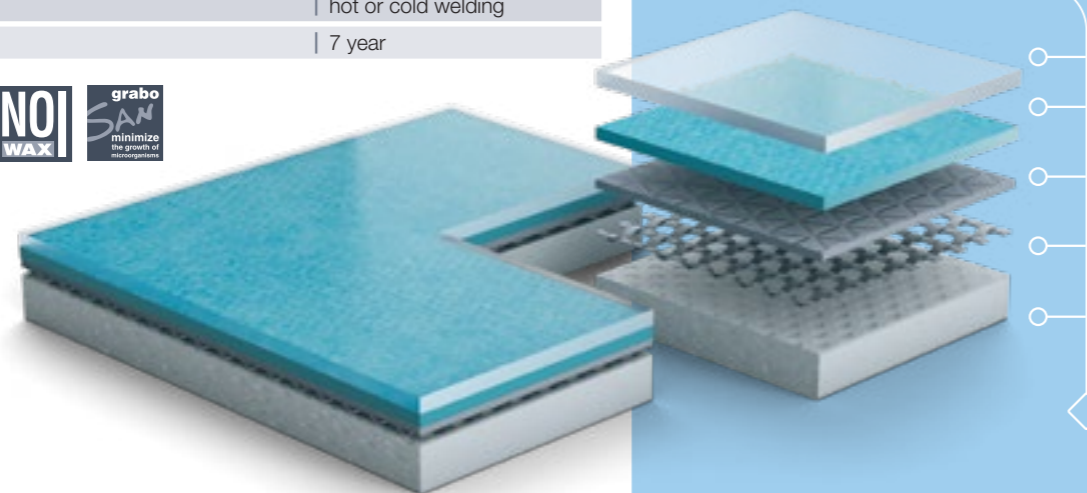


ACOUSTIC PRO

HETEROGENEOUS

## RECOMMENDED USAGE

Library | Education | Healthcare  
Corporate | Retail | Anywhere  
acoustical property is needed

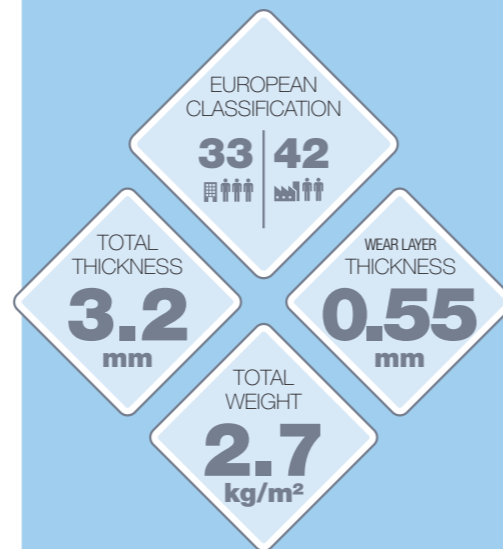

## CONSTRUCTION

- PUR Surface Wear layer
- Design
- Compact layer
- Glass fibre reinforcement
- Foam backing




4313-460-4



# Acoustic Pro



4313-471-4

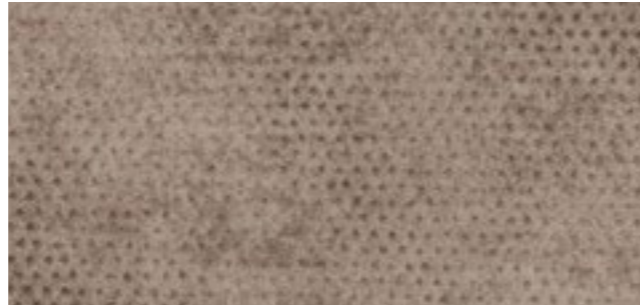

4313-467-4



4313-464-4




4313-460-4




4313-472-4




4313-458-4

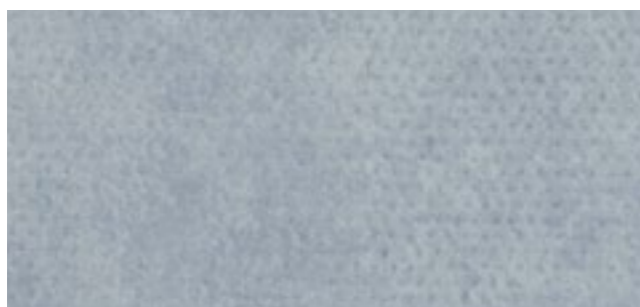

4313-473-4

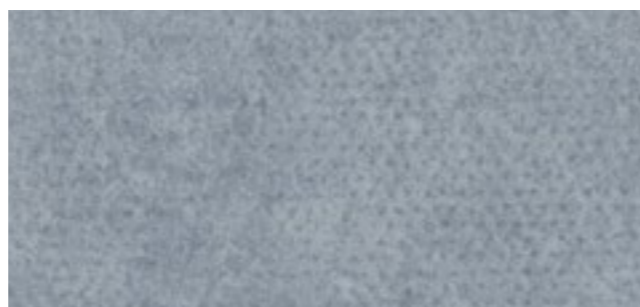

4313-474-4

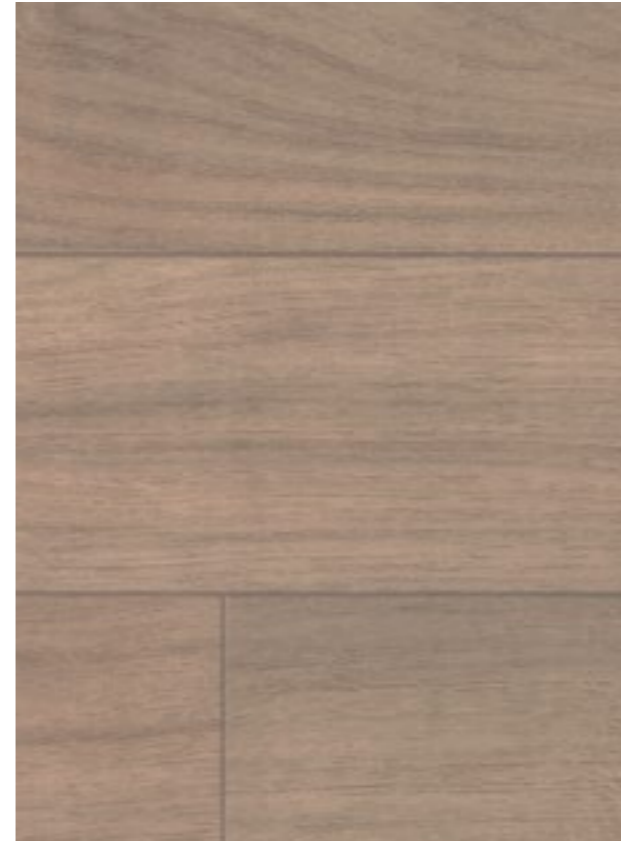

4259-501-5



4259-503-5



4259-504-5