

GRABO

Diamond

PREMIUM COMPACT FLOOR COVERING

HETEROGENEOUS

PERFORMANCE, FEATURES & BENEFITS

Very durable, easy to clean surface | Extreme low residual indentation | Aesthetic matt shine
 Good stain resistance | R10 slip resistance | 10 year warranty

SPECIFICATIONS

DESCRIPTION

Construction	compact heterogeneous	
Total thickness	EN ISO 24346	2,0 mm
Wear layer thickness	EN ISO 24340	0,7 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,8 kg/m ²

CLASSIFICATION


European classification	EN 685	class: 34/43
-------------------------	--------	--------------

PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0,1 mm
	EN ISO 24343	measured 0,01 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	DIN 51130	R10
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Bacterial resistance	EN ISO846:1999	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment		X-Pur
Anti bacterial and fungicid treatment		graboSAN
Enviromental attributes	Phthalate-, solvent and heavy metal free product	
VOC		✓
Seaming method		hot or cold welding
Warranty		10 year


RECOMMENDED USAGE

Education | Healthcare | Offices
 Retail | Hospitality

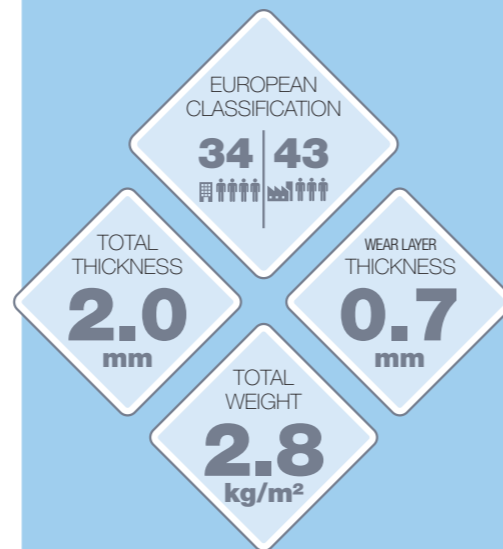

CONSTRUCTION

- X-Pur Wear layer
- Design
- Compact layer
- Glass fibre reinforcement
- Compact backing

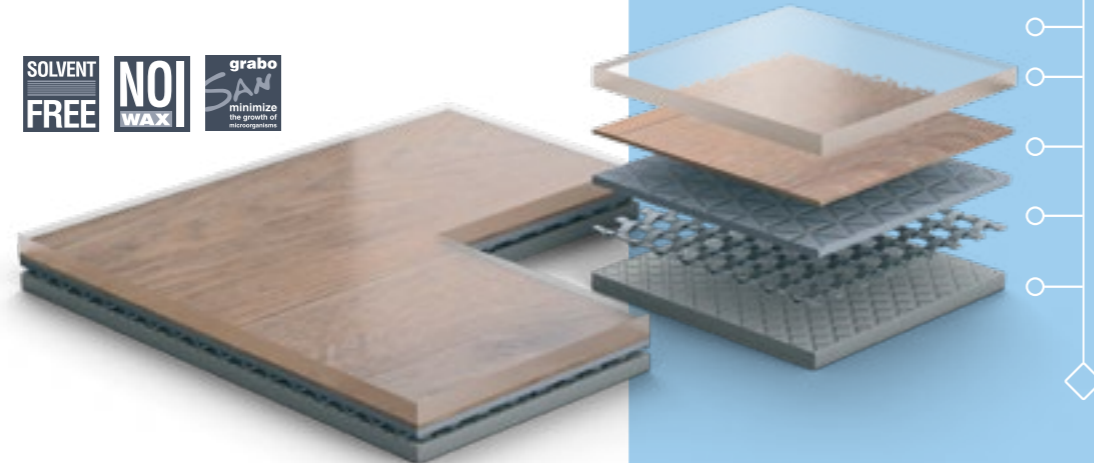

DIAMOND



391-676-275

DIAMOND
Natural



1001-371-891-281



393-672-281




393-652-281



393-873-281



393-669-281

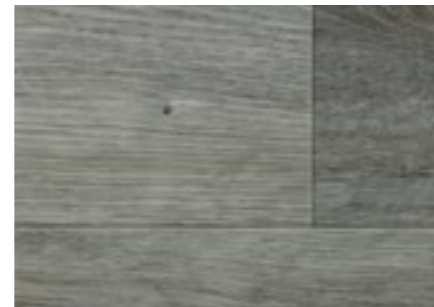

393-870-281




1001-371-890-281



393-874-281



1001-384-874-281

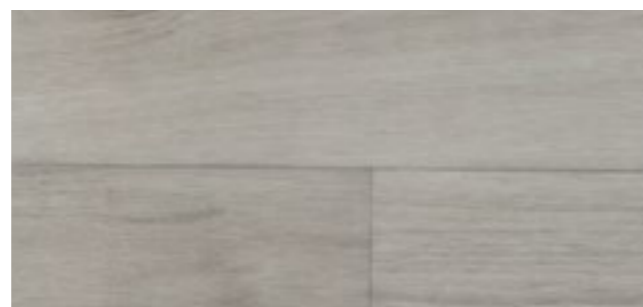

1001-384-885-281

DIAMOND
Concrete



391-674-275



391-673-275



391-653-275



391-654-275



391-656-275



391-671-275



391-660-275



391-676-275

HETEROGENEOUS