

Grabosafe 20 JSK

THE MOST DURABLE SAFETY FLOOR COVERING

HETEROGENEOUS

PERFORMANCE, FEATURES & BENEFITS

Excellent slip resistance | Excellent durability | Dimensionally stable Ant-bacterial
10 year warranty

SPECIFICATIONS

DESCRIPTION

Construction	compact heterogeneous	
Total thickness	EN ISO 24346	2,0 mm
Wear layer thickness	EN ISO 24340	0,9 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,4 kg/m ²

CLASSIFICATION


European classification	EN 685	class: 34/43
-------------------------	--------	--------------

PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0,1 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	class: Bfl-s1
	BS 476	class: 1
	DIN 4102/ÖNORM	class: B1
	Gost 30402-94	class: G1
Slip resistance	DIN 51130	R10
	DIN 51097	C
	EN 13893	class: DS
Abrasion resistance	ISO 9352	-0,25 g/1000 circle
Shore A hardness	ISO 868	90
Chemical resistance	EN ISO 26987	✓
Bacterial resistance	EN ISO846:1999	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment		CLP
Anti bacterial and fungicid treatment		graboSAN
Seaming method		hot or cold welding
Warranty		10 year


RECOMMENDED USAGE

Wet areas | Ramps | Food prep areas
Anywhere safety floor is needed

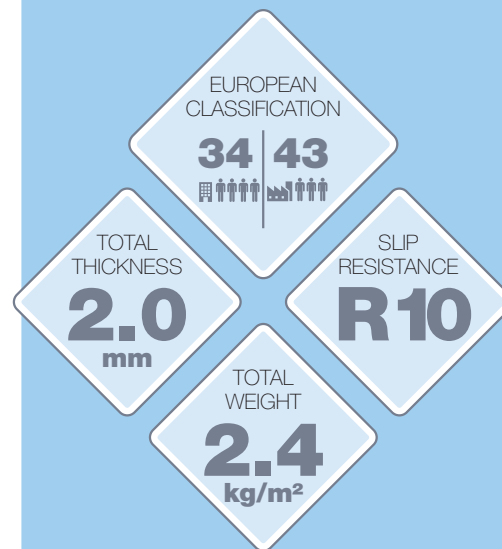


CONSTRUCTION

- CLP wear layer
- PVC Layer
- Glass fibre reinforcement
- Flexyback® non-woven backing

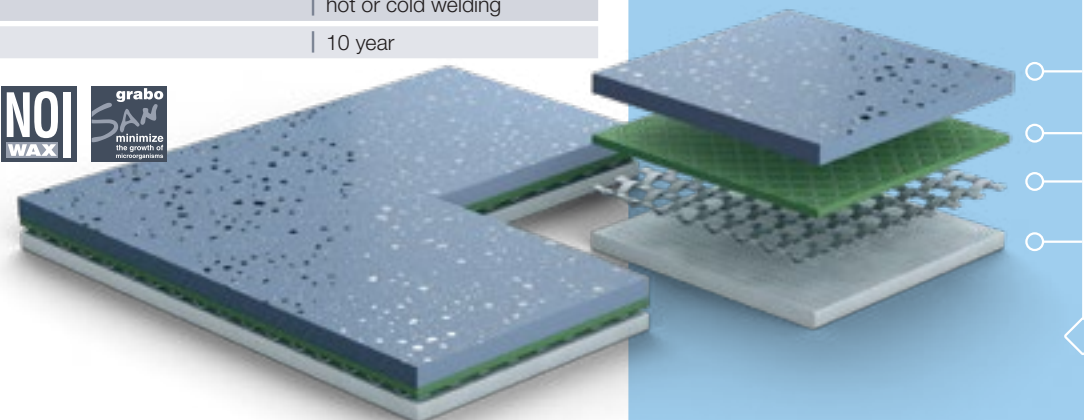


GRABOSAFE 20 JSK

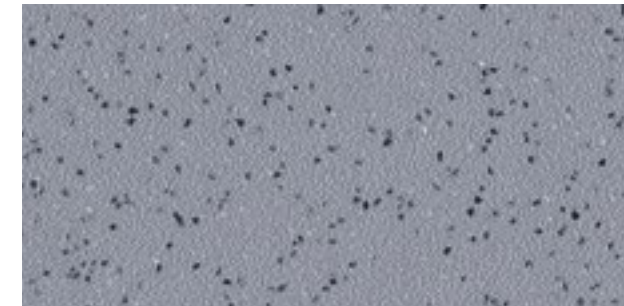

1260-03



2251-03

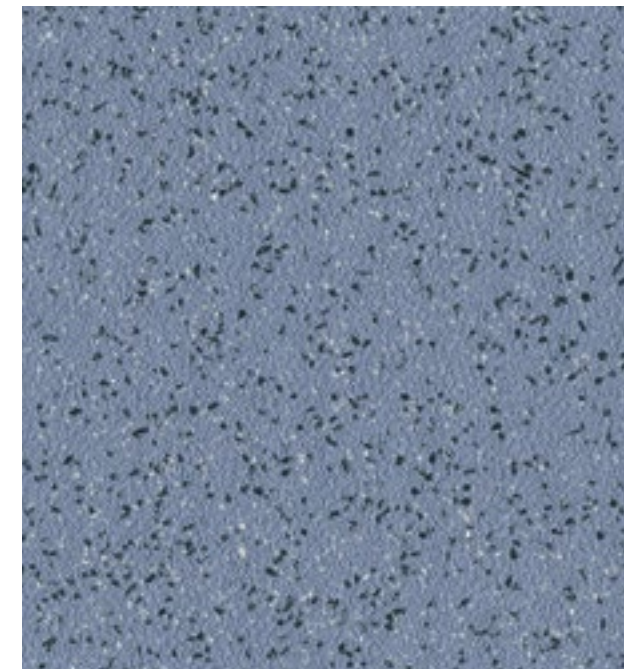

6345-03



5161-03



6091-03



1991-03

HETEROGENEOUS