

Muravyl

HIGH PERFORMANCE FLEXIBLE WALL COVERING

PERFORMANCE, FEATURES & BENEFITS

2 m width | Excellent fire resistance | Dimensionally stable
Anti-bacterial | Antistatic

SPECIFICATIONS

DESCRIPTION

| | | |
|-----------------------------|-----------------------------|-----------------------|
| Construction | heterogeneous wall covering | |
| Total thickness | EN ISO 24346 | 1,5 mm |
| Wear layer thickness | EN ISO 24340 | 0,65 mm |
| Width of roll | EN ISO 24341 | 2 m |
| Length of roll | EN ISO 24341 | 25 lm |
| Total weight | EN ISO 23997 | 1,4 kg/m ² |

CLASSIFICATION

| | | |
|------------------------------|----------------|-------------|
| Product specification | EN 649 | ✓ |
| Residual indentation | EN 433 | max. 0.2 mm |
| Dimensional stability | EN ISO 23999 | max. 0,2 % |
| Light fastness | EN ISO 105-B02 | grade 6 |

PERFORMANCE

| | | |
|--|----------------|-------------------|
| Abrasion group | MSZ EN 660-1 | T |
| Fire resistance | EN 13501-1 | class: B-s2, d0 |
| Chemical resistance | EN ISO 26987 | ✓ |
| Anti bacterial and fungicid treatment | graboSAN | |
| Seaming method | EN ISO846:1999 | heat or cold weld |



WALL COVERING


RECOMMENDED USAGE

Education | Healthcare | Retail | Hospitality | Offices




CONSTRUCTION

- Wear layer
- Glass fibre reinforcement
- Back layer

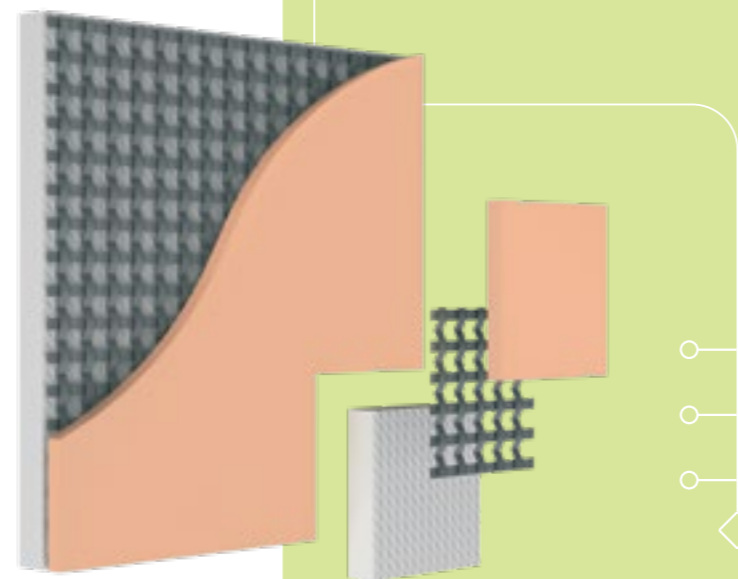

MURAVYL

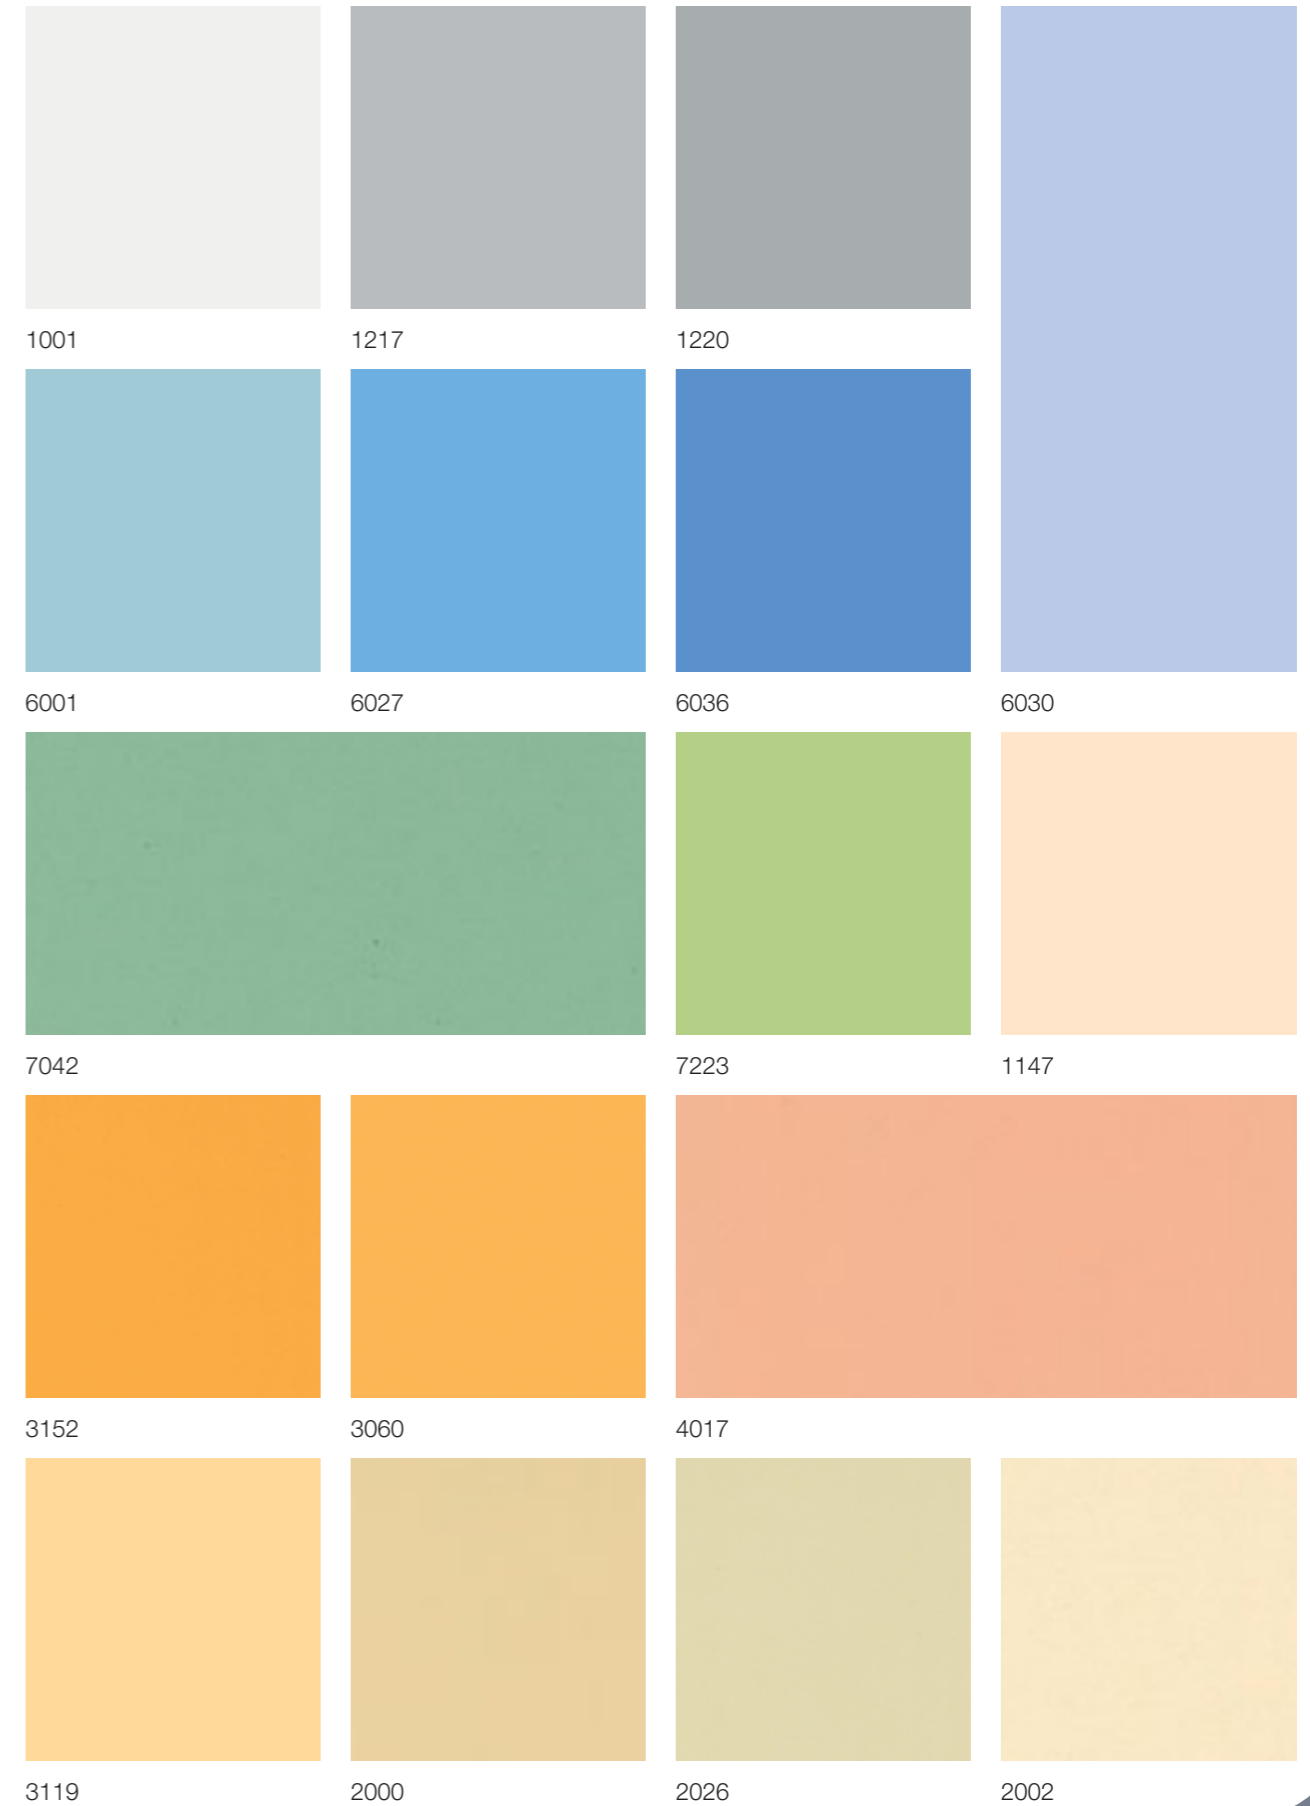

WALL COVERING